

6226-0067 4-pedal footswitch & 4-puckswitch with base

herga

Technology Ltd

Special 4-pedal version of 6226 series footswitch with 4x 6241 puckswitch assembled in modular base system with IPX7 rating


Product description

- Fitted with 4x 6226-BABB-ZZZA-0011 footswitch
- Fitted with 4x 6241-BBAB-BAZZ-003 puckswitch
- Grey footswitch and puckswitch with moulded grey modular base system
- With Herga logo on footswitch
- Complete with 2m of cable and Heyco gland
- Rated IPX7
- Footswitch electrical rating: 1.75A 24V AC/DC
- Puckswitch electrical rating: 50mA 24 VDC
- Wired normally open





Reference dimensions mm


Footswitch



Puckswitch



Modular base

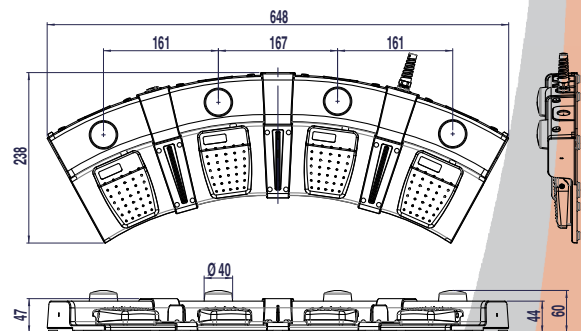

General specifications

Standards/approvals Footswitch & Puckswitch: UL file reference E353500
ANSI/AAI ES60601-1, A1:2012, C1:2009/(R) 2012 and A2:2010 (R) 2012
CSA CAN/CSA-C22.2 No 60601-1-14
IEC 60601-1 Ed 3.1 (2012)
EN 60601-1:2006 & A1:2013 & A12:2014
BS EN 62368-1:2014 & A11:2017

Degree of protection EN 60529 IPX7 (IPX8 upon request)

Connection method 2m of 10-core cable and Heyco gland

Electrical rating Footswitch - 1.75A 24V AC/DC
Puckswitch - 50 mA 24 VDC (operating force <10N)

Contact configuration Normally Open contacts

Operating temperature range +10°C to +50°C

Storage temperature range +10°C to +50°C

Body material Thermoplastic

Weight 2.3 kg (including cable)

Additional information Footswitch - Customized versions available (logos, cordsets, colours, guards)
Base - Lift bars, guards and cable exit options as well as handles, dividers and steel base plate.

Optional accessories



- Bluetooth® switching versions available
- Lift bars, guards and cable exit options can be specified
- Handles, dividers and steel base plate options



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice