

# 6226-0066

## 4-pedal footswitch with modular base

# herga

Technology Ltd

Special 4-pedal version of 6226 series footswitch assembled in modular base system with IPX7 rating


### Product description

- Fitted with 4x 6226-BABB-ZZZA-0011 footswitch
- Grey footswitch with moulded grey modular base system
- With Herga logo on footswitch
- Complete with 2m of cable and Heyco gland
- Rated IPX7
- Footswitch electrical rating: 1.75A 24V AC/DC
- Wired normally open




### Reference dimensions mm

Footswitch



Modular base

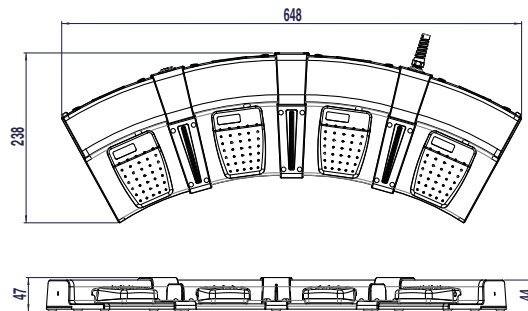

### General specifications

**Standards/approvals** Footswitch: EN 60950, EN 60601-1:2006, UL 60601-1:2005, ANSI/AAMI ES60601-1:2005/(R)2012, CSA-C22.2 No 60601-1:14, UL File No E353500

**Degree of protection** EN 60529 IPX7 (IPX8 upon request)

**Connection method** 2m of 6-core cable and Heyco gland

**Electrical rating** 1.75A 24V AC/DC

**Contact configuration** Normally Open contacts

**Operating temperature range** -20°C to +60°C

**Storage temperature range** -20°C to +70°C

**Body material** Thermoplastic

**Weight** 1.9 kg (including cable)

**Additional information** Footswitch - Customized versions available (logos, cordsets, colours, guards)  
Base - Lift bars, guards and cable exit options as well as handles, dividers and steel base plate.

### Optional accessories



- Bluetooth® switching versions available
- Lift bars, guards and cable exit options can be specified
- Handles, dividers and steel base plate options